



DS-A36-250 Panels Specifications

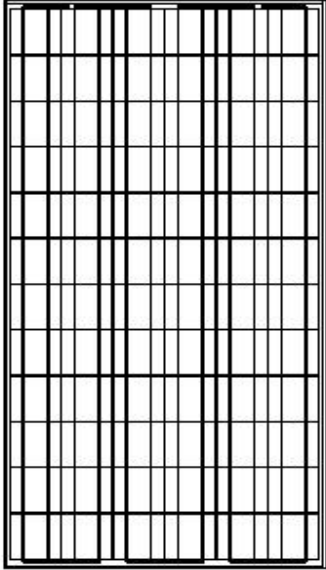

- Solar cells:** Crystalline silicon solar cells
- Laminate:** Glass /EVA / TPT (tedlar/pet/tedlar) or TPE
- Front Side:** High-transmission 3.2mm tempered glass
- Back Side:** TPT /TPE
- Frame:** Clear anodized aluminum frame
- Output :** Junction box

Module Type	Pm(Wp)±5%	Vmpp(V)	Imp(A)	Voc(V)	Isc(A)	Module size	NET(kg)
DS-A36-250	250	36.0	6.94	44.6	7.57	1650*990*45 (mm) 65.0*39.0*1.77 (inch)	18.7

- Operation Temperature Range:** - 40°C ~ 85°C
- NOCT:** 48°C ± 3°C
- Temperature coefficients of Im:** + 0.1 %/°C
- Temperature coefficients of Vm:** - 0.38 %/°C
- Maximum System Voltage:** DC600V
- STC:** 1000W/m², 25°C, AM1.5

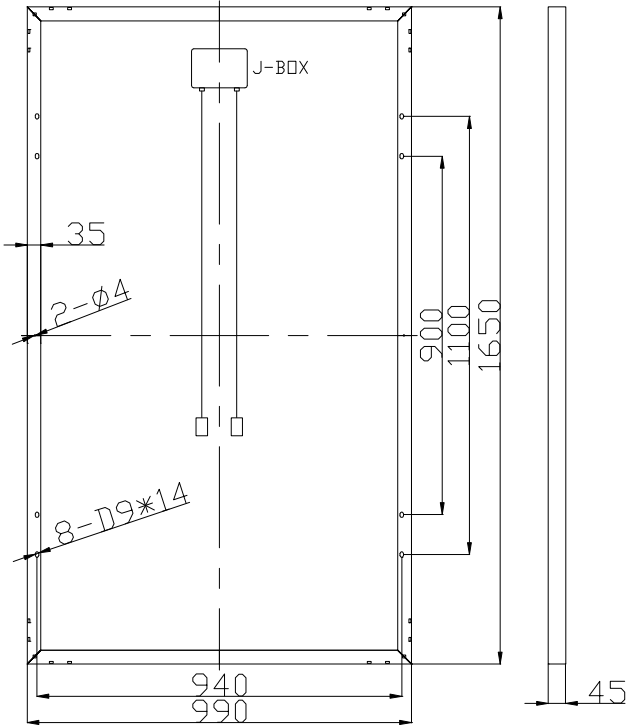

All the data of this sheet are subjected to change without notice.