


DS-A18-50 Panels Specifications

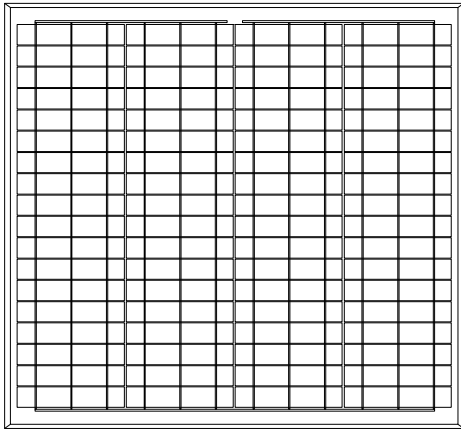

- Solar cells:** Crystalline silicon solar cells
- Laminate:** Glass /EVA / TPT (tedlar/pet/tedlar) or TPE
- Front Side:** High-transmission 3.2mm tempered glass
- Back Side:** TPT /TPE
- Frame:** Clear anodized aluminum frame
- Output:** junction box

Module Type	Pm(Wp)±5%	Vmpp(V)	Imp(A)	Voc(V)	Isc(A)	Module size(mm)	NET(kg)
DS-A18-50	50	18.0	2.78	22.3	3.03	560*665*35mm 22.05"*26.2"*1.38"	4.4

Operation Temperature Range: - 40°C ~ 85°C


NOCT: 48°C ± 3°C

Temperature coefficients of Im: + 0.1 %/°C

Temperature coefficients of Vm: - 0.38 %/°C

Maximum System Voltage: DC600V

STC: 1000W/m², 25°C, AM1.5

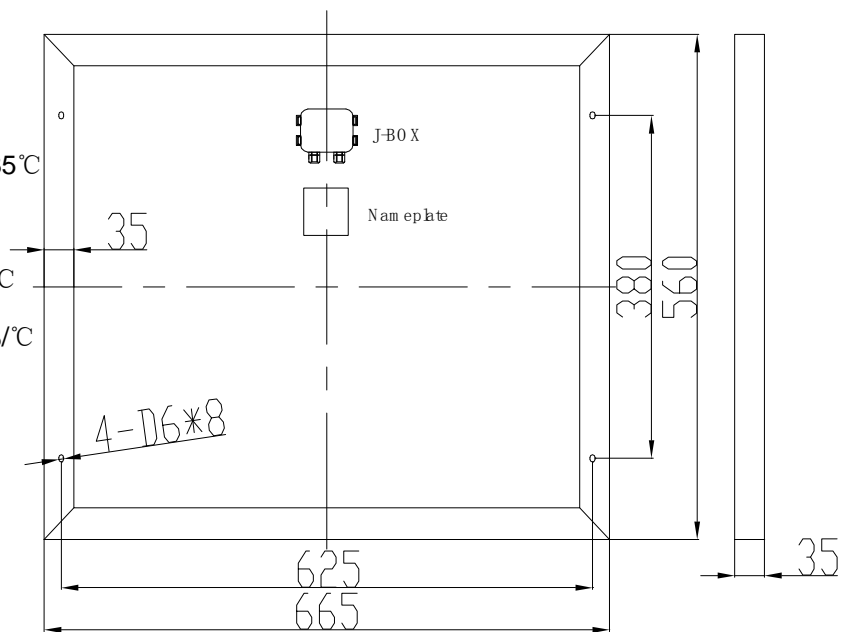

All the data of this sheet are subjected to change without notice.

Anji DaSol Solar Energy Science & Technology Co., Ltd.